


**IN NEED OF
POWER OVER ETHERNET
FOR TWO DEVICES?
NO PROBLEM.**

MEET SOLIS ENERGY'S
PSI PoE
SPLITTER/INJECTOR.

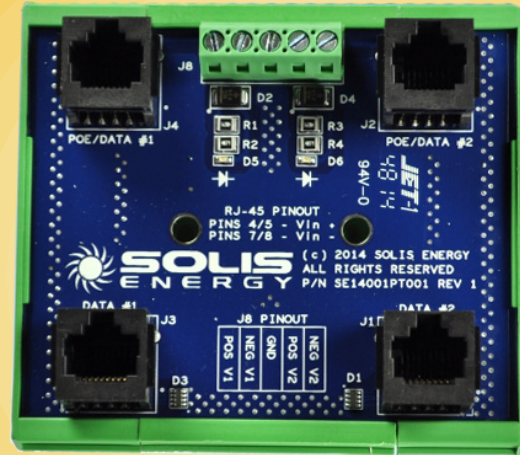

Power two PoE devices simultaneously with ease. The PSI Dual Power over Ethernet Splitter/Injector allows you to provide DC power to two different PoE-equipped devices, including wireless access points and surveillance cameras regardless of input voltage required. By eliminating the need to purchase and install a separate PoE Injector for each electronic device in your application, the PSI saves you time and money.

OUR PSI IS...



DURABLE. Like the other products in our suite, the PSI is built to last and can power your devices in harsh weather and extreme temperature conditions.



DEPENDABLE. The quality materials used in our PSIs ensures a long system life in any climate or location.



FLEXIBLE. Use the PSI as an injector to simultaneously power multiple PoE devices with different voltage requirements, for example, a 48V radio and a 24V camera, or use it as a splitter to separate power from the PoE data interface to run a non-PoE device, such as an analog camera



POWER WHEN YOU NEED IT.

927 Fern St. Suite 1200 • Altamonte Springs, FL 32701
407.339.6786 • www.SolisEnergy.com

Rev 16.12

PSI POE SPLITTER/INJECTOR

ELECTRICAL

- Data Connectors: 4 RJ45 Jacks
- Power Connectors: 5 Position Terminal Blocks (14 - 26 AWG)
- Data Lines: Pins 1 / 2 / 3 / 6
- PoE Power Pinout:
 - Pos VDC: Pins 4 / 5
 - Neg VDC: Pins 7 / 8
- Operating Temperature: -4 – 158 °F (-20 – 70 °C)
- Maximum Current: 1.5 Amps
- RoHS Compliant: Yes

MECHANICAL

- Dimensions: 3.6 x 3.3 x 1.7 in (91.4 x 83.8 x 43.2 mm)
- Mounting: High Temperature Polyamide DIN Rail Support (UL 94 V - 0)



POWER WHEN YOU NEED IT.